

BALDR S

POWER AND PRECISION

MAX OUTPUT	MAX RUNTIME	MAX THROW
		
800 lumens	140 minutes	130 meters

*This information is for market reference only. Please do not make it public.



▲ BLACK



▲ DESERT TAN



▲ GUNMETAL GREY



▲ BLUE



MARKET APPLICATIONS


Self-defense
Law Enforcement
Tactical

UPC

Black 697237812316 9
Desert Tan 697237812317 6
Gunmetal Grey 697237812318 3
Blue 697237812333 6

DESCRIPTION

The Baldr S is one of the most powerful compact light/green beam combos on the market. Its white light output goes up to an amazing 800 lumens and is complemented by a low 100-lumen setting. Its adjustable green beam provides foolproof accuracy when zeroed to your setup. Using the setting switch, you can change between the white light, green beam, and combined settings easily without turning it off. The built-in lithium polymer battery is increased to 3.7V 380mAh, ensuring a max runtime of 140 minutes. The Baldr S still features the patented sliding rail mount to easily adjust the light to your desired position and includes two types of rail adapters to fit both Glock and Picatinny rails. With the quick-install system, you can attach and release the light in seconds for instant activation. This powerful, precise, compact, and adjustable WML is the perfect compact defense light source.

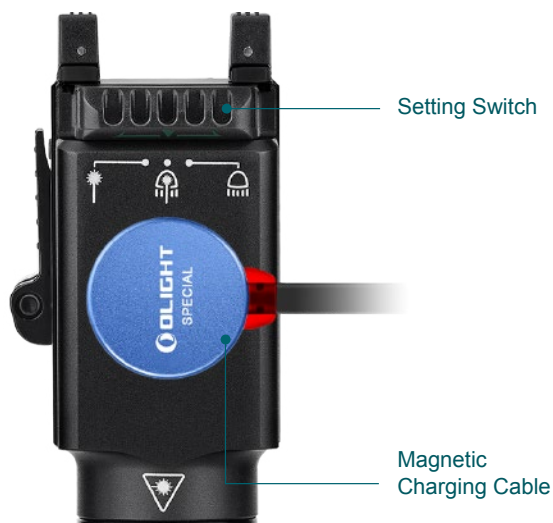

FEATURES

- Max 800 lumens of white light output, 33% more light than the previous Baldr Mini, and a new 100-lumen low mode when needed indoors.
- Built-in 3.7V 380mAh lithium polymer battery, ensuring a max runtime of 140 minutes when the light is set to 100 lumens.
- A mode setting switch to select white light only, green beam only, or both combined.
- Patented sliding rail mount makes the light custom-fit to your specific rail length. It also includes a swing arm to quickly install or release the light.
- Comes standard with both Glock and Picatinny sized rail inserts for superb compatibility.
- Dual ambidextrous switches for smooth momentary-on or constant-on activation by either hand with ease.

OUTPUT

SPECIFICATIONS	MODE 1	MODE 2
	800 ~ 300 lumens	100 lumens
 Green Beam ON	1+2+30 minutes	90 minutes
 Green Beam OFF	1+2+37 minutes	140 minutes
	130 meters	45 meters
	4,400 cd	540 cd

* All data above are test results according to ANSI/NEMA FL 1-2009 standards.

LIGHT SOURCE

High Performance LED (6000~7500K)

DIMENSION

Length: 2.48in/63mm
Head Diameter: 1.28in/32.5mm
Body Diameter: 1.42in/36mm

WEIGHT

3.35oz/95g (Including Battery)

BODY MATERIAL

Aluminum Alloy

POWERED BY

3.7V 380mAh Rechargeable Lithium Polymer Battery (Built-in)

WARRANTY

Olight's 2-Year Warranty
Visit: <https://olightworld.com/olight-warranty>

IN THE BOX

Baldr S (Battery Built-in) x 1
Picatinny (MIL-STD-1913) Rail Mount Adapter x 1
HM2.5*4.5 Socket Cap Screw x 2
M3x4 Socket Set Screw x 2
H1.5 Allen Wrench x 1
Oval Point Set Screw x 1
Cone Point Set Screw x 1
MCC (Magnetic Charging Cable) Special Edition x 1
User Manual x 1

**WATER
RESISTANT
IPX4**



DROP TEST



COMPLIANCE



olightworld.com © OLIGHT 07/15/21 V1
Made in China

Note: There are slight differences between the picture and the real item caused by light color temperature. All the pictures are for reference only.